

ES-0500L-M12

5 Port M12/IP67 Industrial Unmanaged Ethernet Switch



- 5x 10/100T(x) M12 connector
- Built for harsh environments and wide temperature range application
- IP67 housing



Specifications

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX
-----------	---

Processing Type	Store and Forward
-----------------	-------------------

Switch Properties

Switch Fabric	1Gbps
---------------	-------

Priority Queues	-
-----------------	---

MAC Table Size	1K
----------------	----

Packet Buffer	448Kbits
---------------	----------

Interface

Network Connector	5x 10/100T(x) M12 Female D-coded 4-pole, auto negotiation speed duplex mode, auto MDI/MDI-X
-------------------	---

LED Indicators	Per unit: PWR Ports: Link/Active(Green)
----------------	--

Power Requirements

Operation Voltage	12-48VDC
-------------------	----------

Connection	M12 Male A-coded 5-pole
------------	-------------------------

Power Consumption	0.03A@24VDC
-------------------	-------------

Protection	Overload Current Protected, Reverse Polarity Protected
------------	--

Mechanical Construction

Enclosure	Plastic
-----------	---------

Protection Class	IP67
------------------	------

Dimensions	33x217x43 mm (WxHxD)
------------	----------------------

Weight	0.30 kg
--------	---------

Mounting	Wall Mounting Kits
----------	--------------------

Environmental Limits

Operating Temperature	Extended: -40°C ~ 75°C (-40°F ~ 167°F)
-----------------------	--

Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
---------------------	------------------------------

Ambient Relative Humidity	5 to 95%, (Non-Condensing)
---------------------------	----------------------------

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
-----	--

EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS)
-----	--

Free Fall	IEC60068-2-32
-----------	---------------

Shock	IEC61373
-------	----------

Vibration	IEC61373
-----------	----------

Green	RoHS Compliant
-------	----------------


MTBF	>100,000 hours
------	----------------

Warranty	5 Years
----------	---------

Features with star(*) implies those are under development.

In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

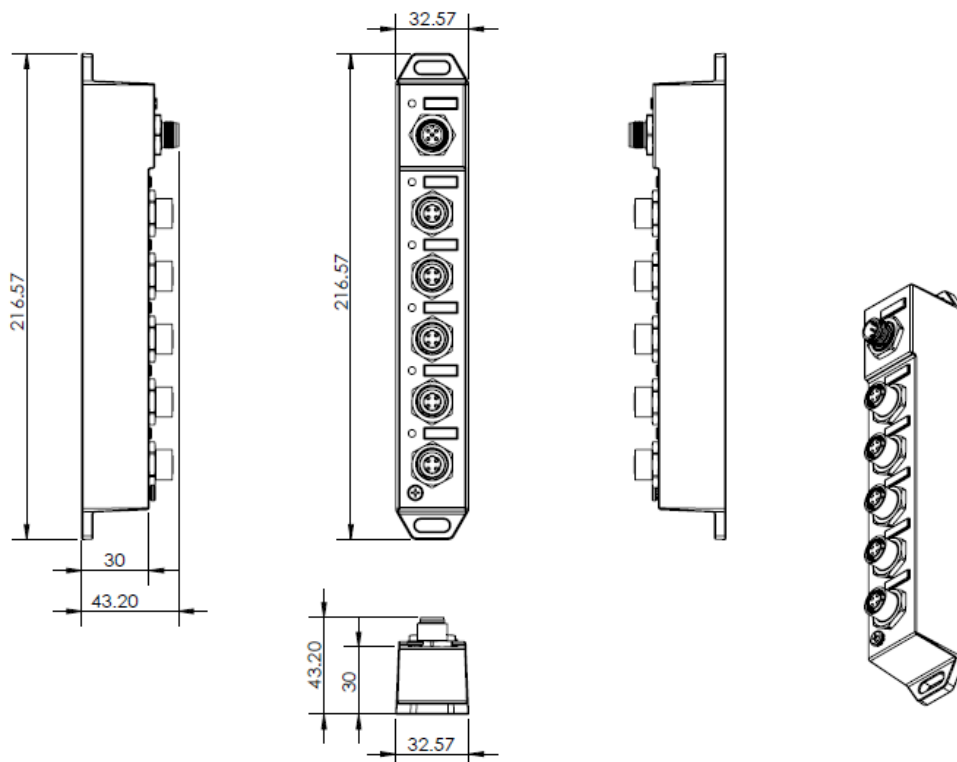

Ordering Information

ES-0500L-M12-T

- 5 Port M12/IP67 Industrial Unmanaged Ethernet Switch
- 5x 10/100T(x) M12 connector
 - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F)