

EP-0401L-SC

4+1 Port Industrial Unmanaged PoE+ Ethernet Switch



- 4x Fast Ethernet ports with IEEE 802.3at PoE+
- 1x 100F(x) Fiber Ports
- Built for harsh environments and wide temperature range application
- IP30 housing
- DIN-Rail Mounting



Specifications

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet IEEE 802.3at PoE+
------------------	--

Processing Type	Store and Forward
------------------------	-------------------

Switch Properties

Switch Fabric	1Gbps
----------------------	-------

Priority Queues	-
------------------------	---

MAC Table Size	1K
-----------------------	----

Packet Buffer	448Kbits
----------------------	----------

Interface

RJ45 Port	4x 10/100T(x) with PoE+, auto negotiation speed duplex mode, auto MDI/MDI-X
------------------	---

Fiber Port	1x 100F(x)
-------------------	------------

PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6, Endspan, MDI Mode A
--------------------	---

LED Indicators	Per unit: PWR1, PWR2, Fault Ports: Link/Active(Green) PoE: Output Power
-----------------------	--

Power Requirements

Operation Voltage	48-57VDC, redundant dual inputs,
--------------------------	----------------------------------

>50VDC for PoE+ output recommended

Connection	1x removable 4-contact terminal block
-------------------	---------------------------------------

Power Consumption	0.06A@48VDC without PDs' consumption
--------------------------	--------------------------------------

PoE Power Budget	Max. 120W for total PD consumption, Max. 30 W per PoE port
-------------------------	--

Protection	Overload Current Protected, Reverse Polarity Protected
-------------------	--

Mechanical Construction

Enclosure	SECC
------------------	------

Protection Class	IP30
-------------------------	------

Dimensions	27x105x95 mm (WxHxD)
-------------------	----------------------

Weight	0.51 kg
---------------	---------

Mounting	DIN-Rail Mounting
-----------------	-------------------

Environmental Limits

Operating Temperature	Extended: -40°C ~ 75°C (-40°F ~ 167°F)
------------------------------	--

Storage Temperature	-40°C ~ 85°C
----------------------------	--------------

Ambient Relative Humidity	5 to 95%, (Non-Condensing)
----------------------------------	----------------------------


Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32

Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	IEC 61000-6-2 IEC 61000-6-4
MTBF	>100,000 hours
Warranty	5 Years

Features with star(*) implies those are under development.
In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

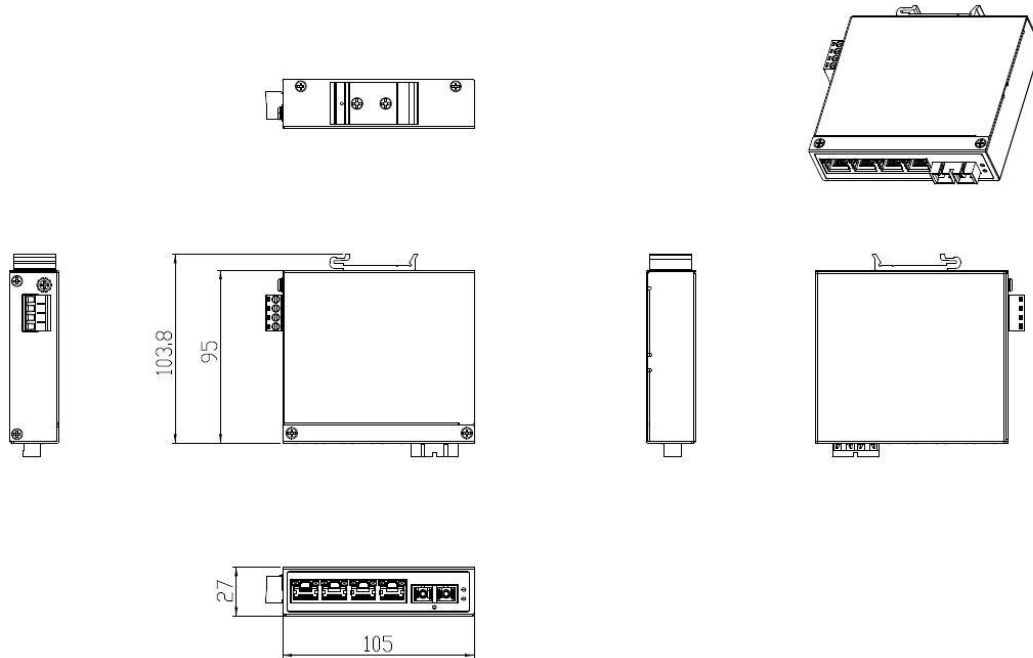

Ordering Information

EP-0401L-SC-T 4+1 Port Industrial Unmanaged PoE+ Ethernet Switch
 - 4x 10/100T(x) with 30W PSE + 1x 100F(x)
 - Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F)

Optional Accessories

NDR-240-48 240W Industrial DIN-Rail Power Supply, 48VDC (metal case)
NDR-480-48 480W Industrial DIN-Rail Power Supply, 48VDC (metal case)