

CP-2408NF

24+4+4 Port 10G Managed L3 PoE+ Ethernet Switch with 25G Uplink



- 24x 10GBASE-T Ethernet ports with IEEE 802.3at PoE+
- 4x 1G/10G SFP+ Slot
- 4x 1G/10G/25G SFP28 Slot
- RSTP, MSTP, ERPS, LACP for Network Redundancy
- QoS CoS/DSCP to increase determinism
- Supports IGMP Snooping v1/v2/v3, up to 1023 groups
- DHCP Relay Option 82 for policies IP address assignment
- SNMP v1/v2c/v3 for network management
- Supports Storm Protection
- USB storage for configuration-free replacement
- Supports PoE PD Alive Check Function for PoE Device Power Recycle

Specifications

Technology

IEEE 802.3u 100BaseTX
IEEE 802.3ab 1000BaseT
IEEE 802.3ae 10GBase over Fiber
IEEE 802.3x Flow Control
IEEE 802.3ad/802.1AX LACP
IEEE 802.3af Power over Ethernet
IEEE 802.3at PoE+
IEEE 802.1D Spanning Tree Protocol
IEEE 802.1w Rapid STP
IEEE 802.1s Multiple STP
ITU-T G.8032 / Y.1344 ERPS
IEEE 802.1Q VLAN Tagging
IEEE 802.1ad Stacked VLANs
IEEE 802.1p Class of Service
IEEE 802.1X Network Authentication
IEEE 802.1AB LLDP

Standards

Processing Type Store and Forward

Switch Properties

Switch Fabric 760Gbps

Priority Queues 8 Queues

Jumbo Frame 12288byte

MAC Table Size 32K

Packet Buffer 32Mbits

VLAN Table Size 4094

IGMP Group 4096

ACL Group 4096

VLAN IP Entries 256

Routing Entries 16K/8K host, 16K/16K LPM

(IPv4/IPv6)

Software Feature

Network Redundancy RSTP, MSTP, G.8032 ERPSv2, Port Trunking with LACP

Security 802.1X, RADIUS, TACACS+, SSL, SSH

Management IPv4, IPv6, Web, Telnet, Serial Console, CLI, SNMP v1/v2c/v3, uPnP

Diagnostics RMON, SNMP Inform/Trap, Syslog, SMTP, Port Mirroring, LLDP

Configuration DHCP Server/Client, Relay Option 82, TFTP, USB

Filter 802.1Q VLAN, Q-in-Q, IGMP Snooping v1/v2/v3, IGMP Querier, Independent Vlan Learning

Time Sync. NTP

QoS CoS, DSCP, WRR/SPQ Queuing, Storm Protection

PoE Powering Status, PoE Monitoring, Scheduling, PD Alive Check

L3 Switching Static Routing, RIP v1/v2, RIPng, OSPF v2, OSPF v3, VRRP v2, PIM-SM

Interface

RJ45 Port 24x 100M/1G/2.5G/5G/10G-T(x) with PoE+, auto negotiation speed duplex mode, auto MDI/MDI-X

Fiber Port 4x 1G/10G SFP+ Slot
4x 1G/10G/25G SFP28 Slot


PoE Pin Out V+, V+, V-, V-, for pin 1, 2, 3, 6, Endspan, MDI Mode A

LED Indicators	Per unit: PS1, System, Status, FAN, PoE Max Ports: Link/Active with highest speed(Green), low speed(Yellow) PoE: Output Power (Blue), Disable (Amber)
Button	Multiple functions reset button
Serial Console	1x RS232 in RJ45 connector with console cable, 115.2Kbps, 8N1
Storage	1x USB 2.0 storage for firmware update, configuration backup, restore, boot up and syslog
Power Requirements	
Operation Voltage	100~240VAC, 48~57VDC inputs
Connection	AC socket, DC 4-pin terminal block
Power Consumption	46W without PDs' consumption
PoE Power Budget	Max. 370W@AC for total PD consumption, Max. 30 W per PoE port
Protection	Overload Current Protected
Mechanical Construction	
Enclosure	Aluminum / Steel met

Protection Class	IP30
Dimensions	440x44x310 mm (WxHxD)
Weight	6.00 kg
Mounting	Rack Mounting
Environmental Limits	
Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (Non-Condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS) IEC61000-4-8 (Magnetic Field)
Green	RoHS Compliant
MTBF	>100,000 hours
Warranty	3 Years

Features with star(*) implies those are under development.
In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

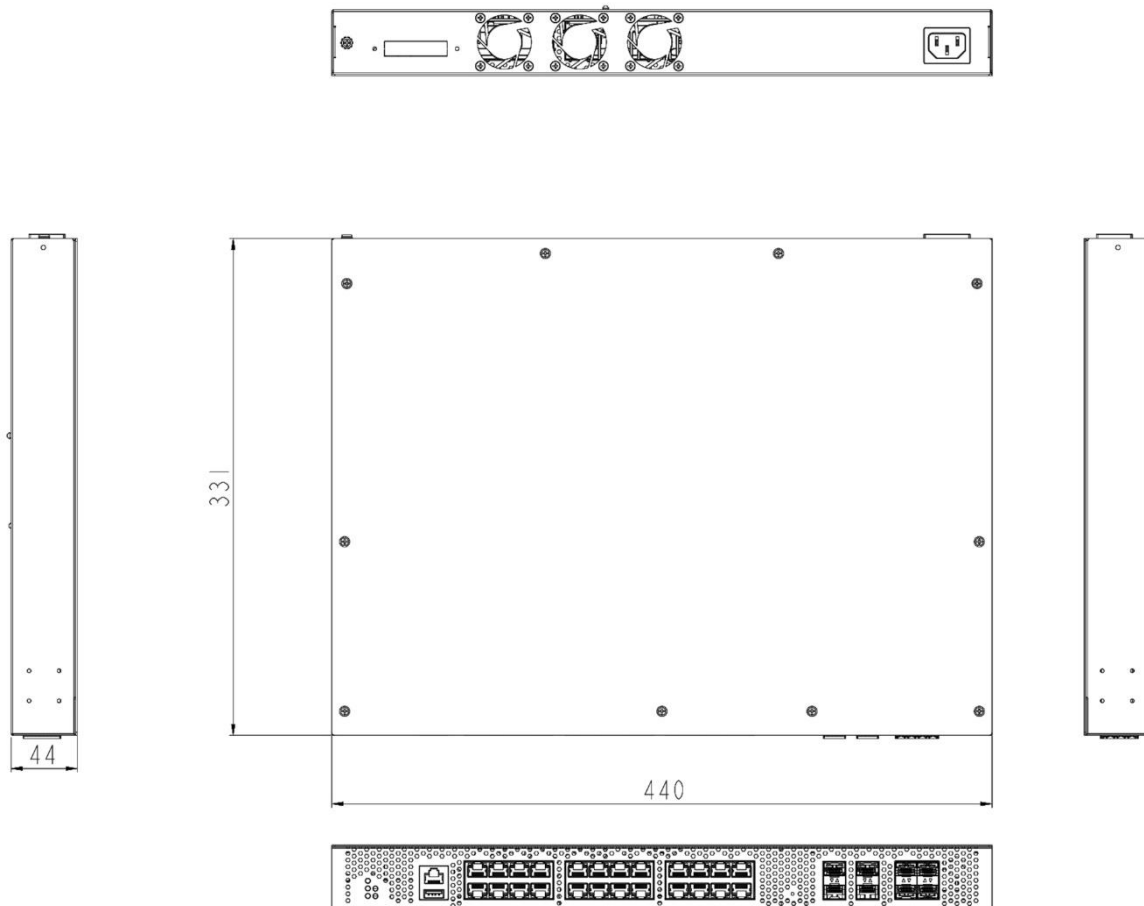

Ordering Information

CP-2408NF-1AC

24+4+4 Port Industrial Managed Gigabit Switch with 25G Uplink

- 24x 100/1G/10G-T(x) + 4x 10G SFP+ Slot + 4x 25G SFP28 Slot
 - Operating Temperature: 0°C ~ 50°C (32°F ~ 122°F)
 - 1x 100~240VAC Power Input
-