

ES-0500L-M12

5 Port M12/IP67 Industrial Unmanaged Ethernet Switch



- 5x 10/100T(x) M12 connector
- Built for harsh environments and wide temperature range application
- IP67 housing



Specifications

Technology

Standards	IEEE 802.3 10BaseT IEEE 802.3u 100BaseTX
------------------	---------------------------------------------

Processing Type	Store and Forward
------------------------	-------------------

Switch Properties

Switch Fabric	1Gbps
----------------------	-------

Priority Queues	-
------------------------	---

MAC Table Size	1K
-----------------------	----

Packet Buffer	448Kbits
----------------------	----------

Interface

Network Connector	5x 10/100T(x) M12 Female D-coded 4-pole, auto negotiation speed duplex mode, auto MDI/MDI-X
--------------------------	---------------------------------------------------------------------------------------------

LED Indicators	Per unit: PWR Ports: Link/Active(Green)
-----------------------	----------------------------------------------------------

Power Requirements

Operation Voltage	12-48VDC
--------------------------	----------

Connection	M12 Male A-coded 5-pole
-------------------	-------------------------

Power Consumption	2W
--------------------------	----

Protection	Overload Current Protected, Reverse Polarity Protected
-------------------	--------------------------------------------------------

Mechanical Construction

Enclosure	Plastic
------------------	---------

Protection Class	IP67
-------------------------	------

Dimensions	33x217x43 mm (WxHxD)
-------------------	----------------------

Weight	0.30 kg
---------------	---------

Mounting	Wall Mounting Kits
-----------------	--------------------

Environmental Limits

Operating Temperature	Extended: -40°C ~ 75°C (-40°F ~ 167°F)
------------------------------	----------------------------------------

Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
----------------------------	------------------------------

Ambient Relative Humidity	5 to 95%, (Non-Condensing)
----------------------------------	----------------------------

Regulatory Approvals

EMI	FCC Part 15 Subpart B Class A CE EN 55032 Class A
------------	------------------------------------------------------

EMS	IEC61000-4-2 (ESD) IEC61000-4-3 (RS) IEC61000-4-4 (EFT) IEC61000-4-5 (Surge) IEC61000-4-6 (CS)
------------	------------------------------------------------------------------------------------------------------------

Free Fall	IEC60068-2-32
------------------	---------------

Shock	IEC61373
--------------	----------

Vibration	IEC61373
------------------	----------

Green	RoHS Compliant
--------------	----------------


MTBF	>100,000 hours
-------------	----------------

Warranty	5 Years
-----------------	---------

Features with star(*) implies those are under development.

In a continuing effort of improvement and updated technology, product specifications are subject to change without notice.

Dimensions (unit = mm)

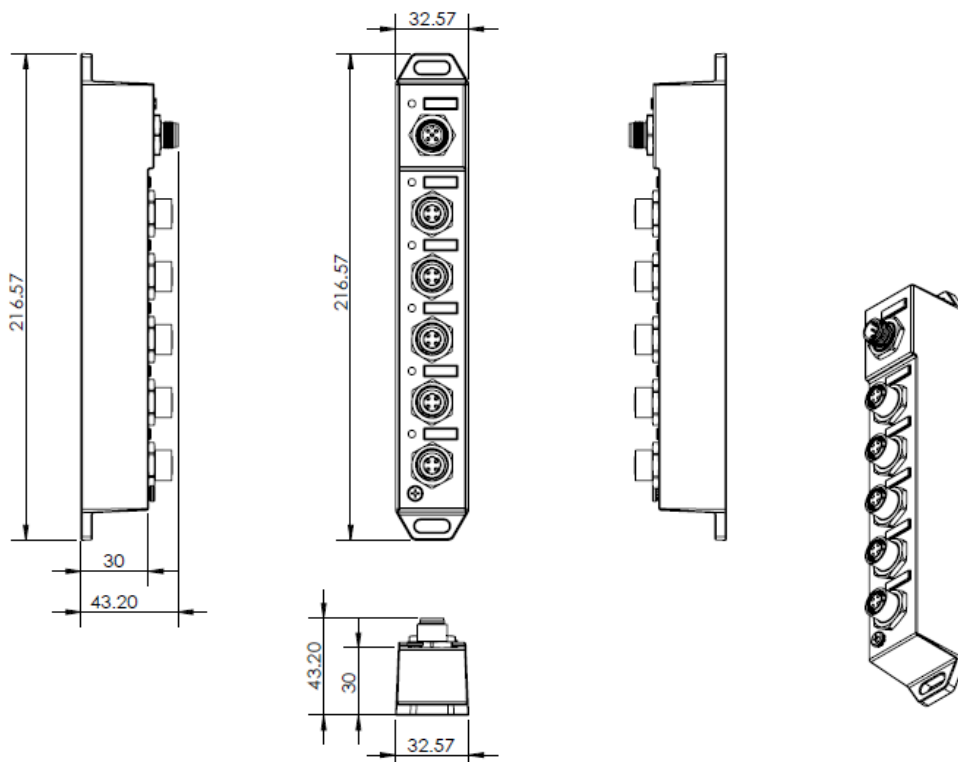

Ordering Information

ES-0500L-M12-T

- 5 Port M12/IP67 Industrial Unmanaged Ethernet Switch
- 5x 10/100T(x) M12 connector
- Operating Temperature: -40°C ~ 75°C (-40°F ~ 167°F)